

# CETA 100

## Temperature difference control

# Control system CETA

## CETA 100

1x Differential control




### CETA RC


Remoute control  
without room function



PT 1000/2,5/6  
Sensor Heat supplier

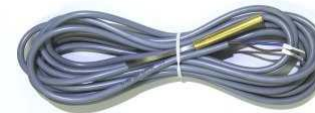

KVT 20/2/6  
Sensor Heating buffer

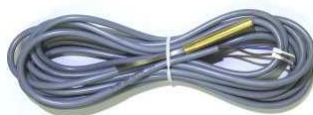

Optionally, a return flow sensor (KVT 20/2/6) can be  
connected for heat balancing  
(not included)

# Control system CETA

## CETA 100


1x Differential control



KVT 20/2/6 (Sensor F1)




PT 1000/2,5/6 (Sensor F3)

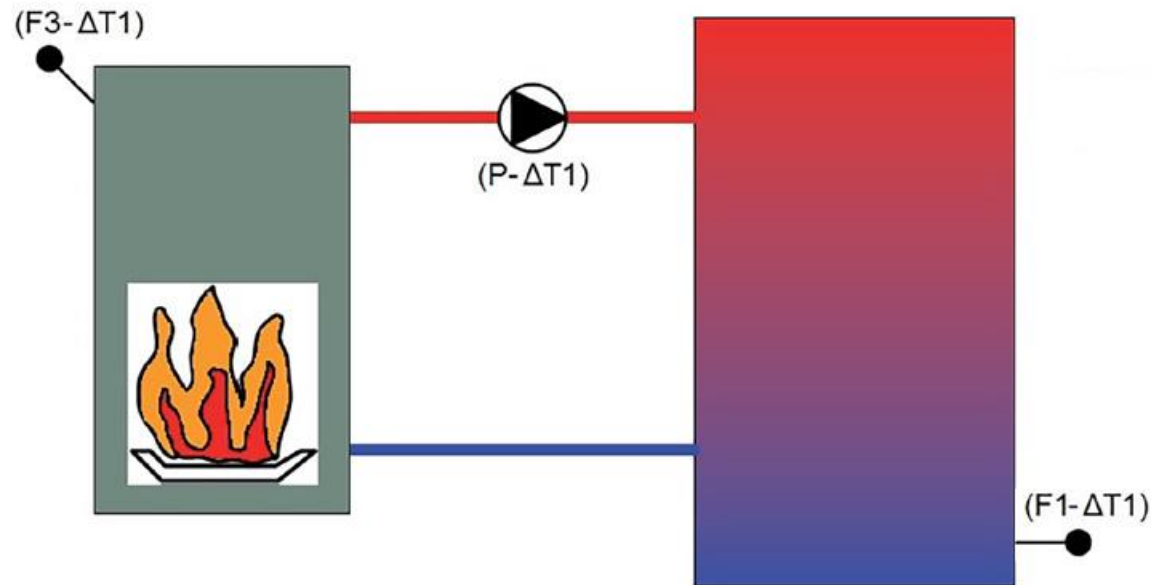

Preferred use for solids systems,  
to control a pump for buffer charging.


# Control system CETA

## CETA 100 Basic Display

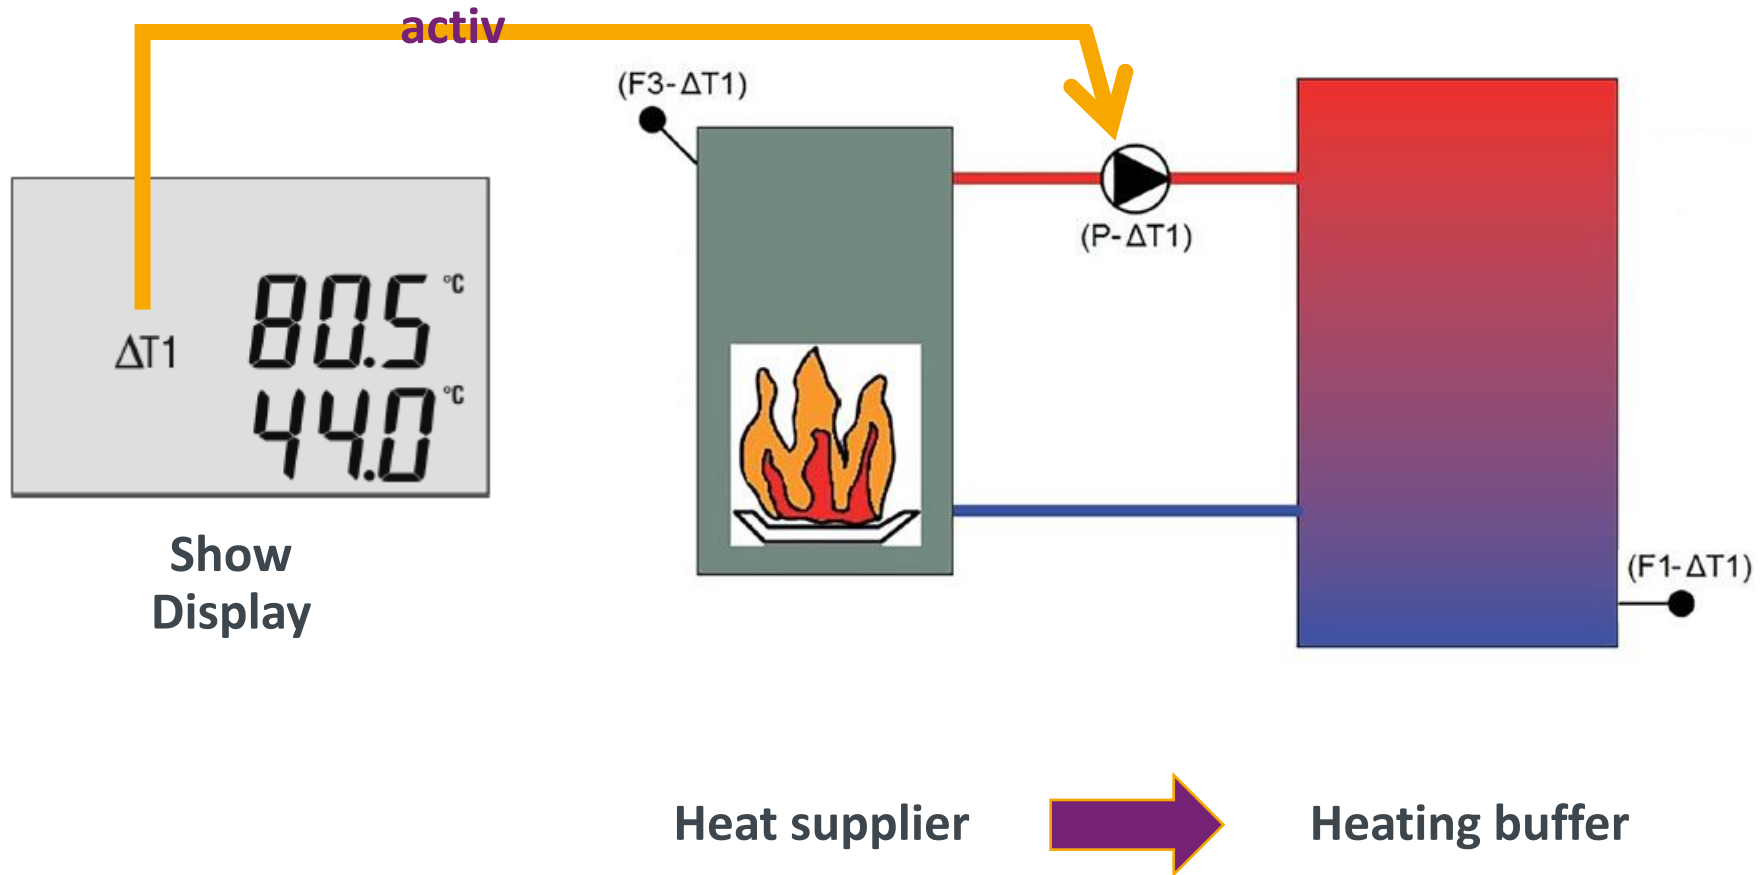


# Control system CETA

## CETA 100 Basic Display

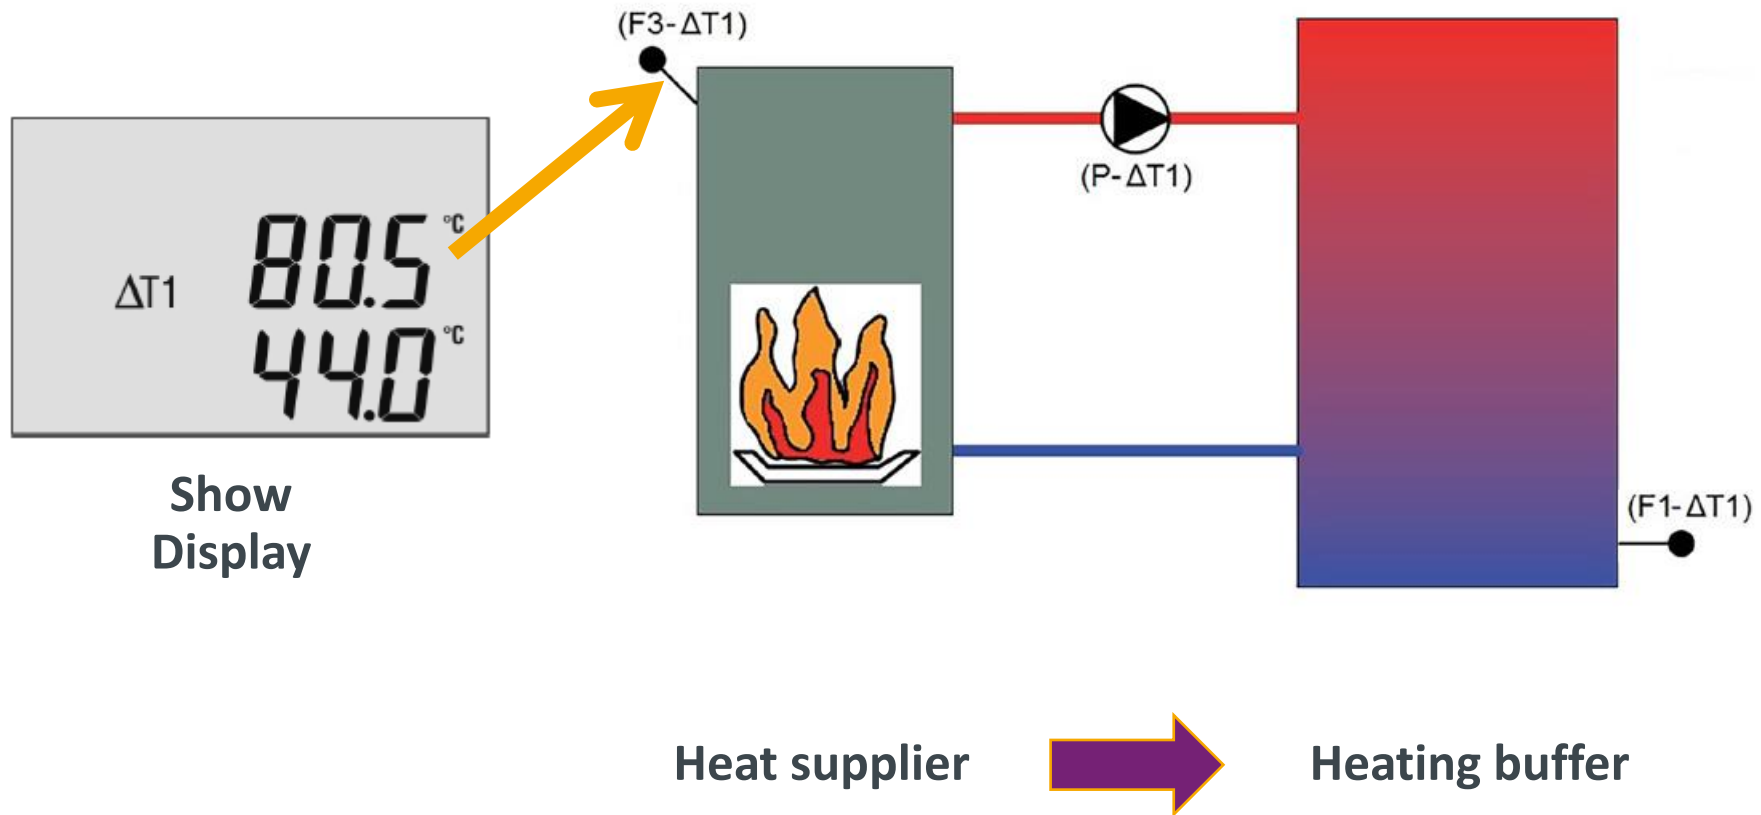

# Control system CETA


## CETA 100 Basic Display

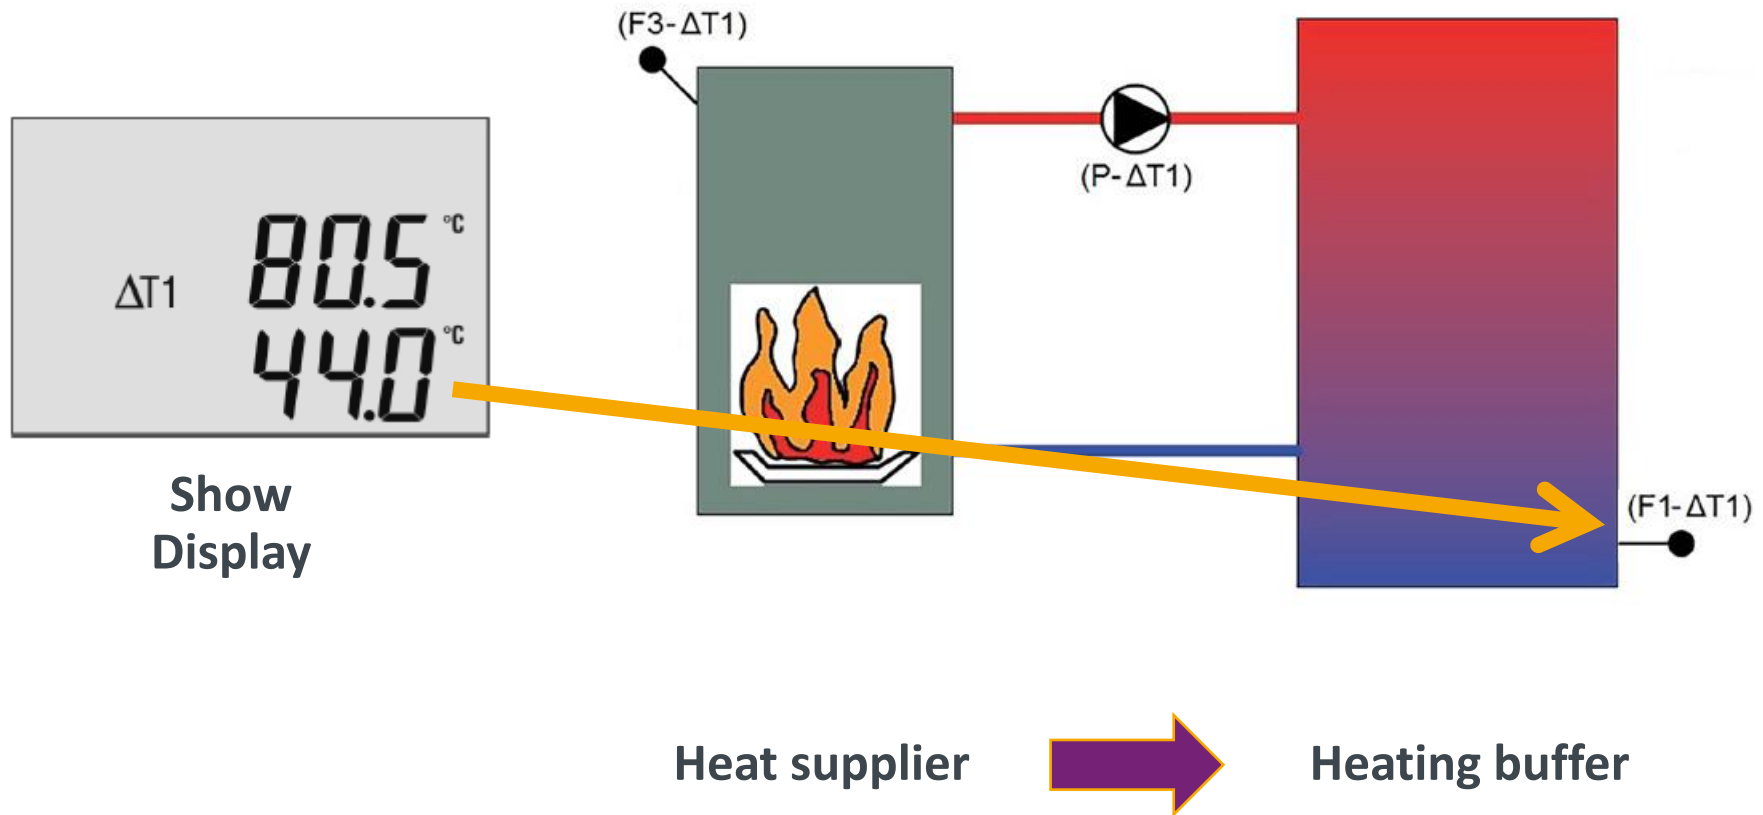

# Control system CETA

## CETA 100


Further possibilities of use

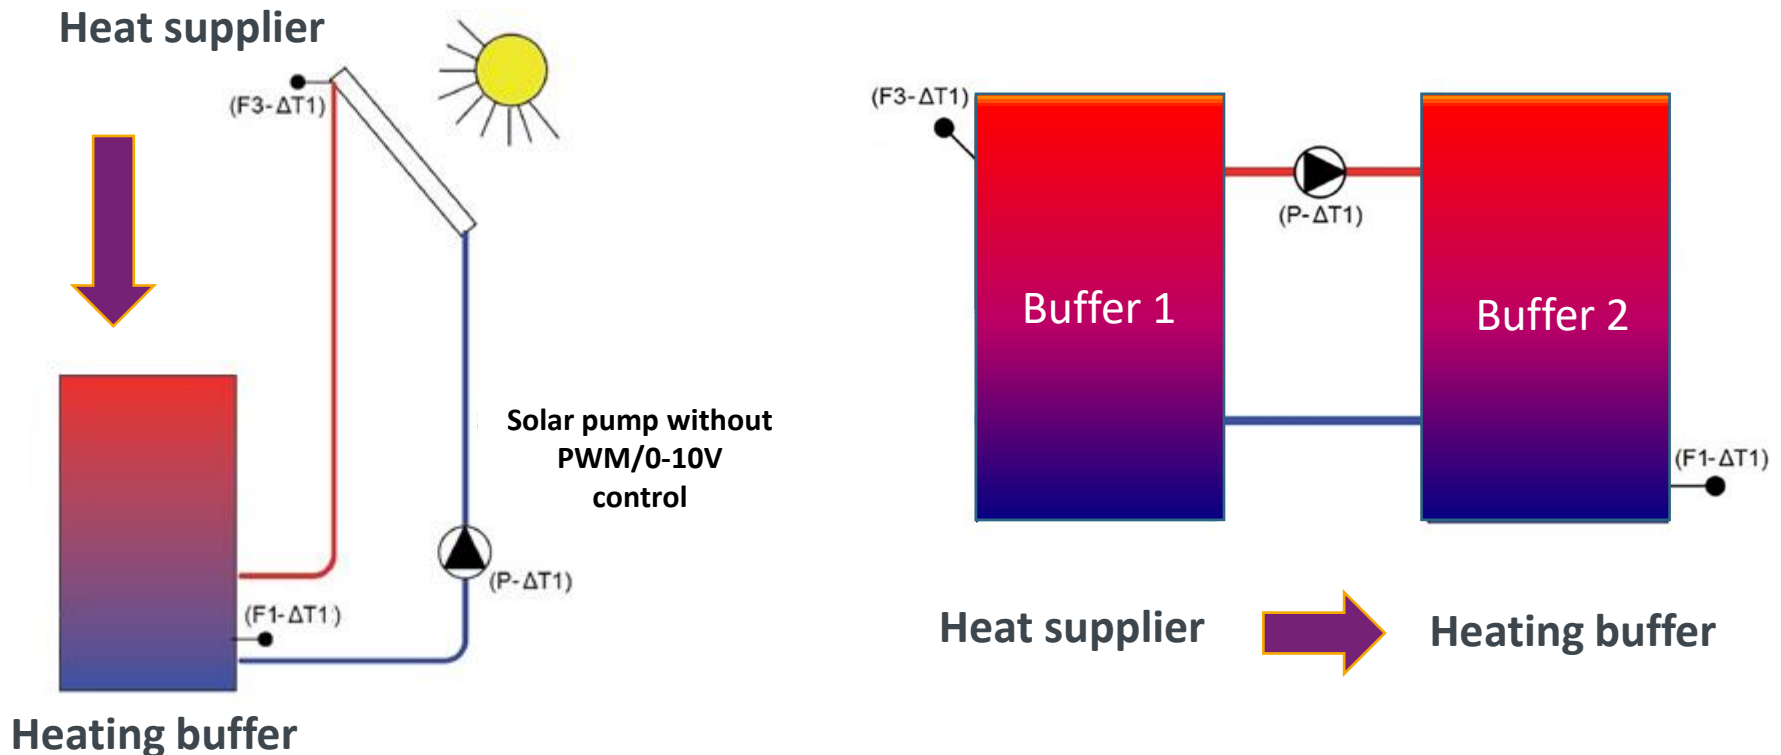

Differential control can also be implemented as thermostat control. In this case only the sensor F1 is used.

# Control system CETA

## CETA 100 Connection

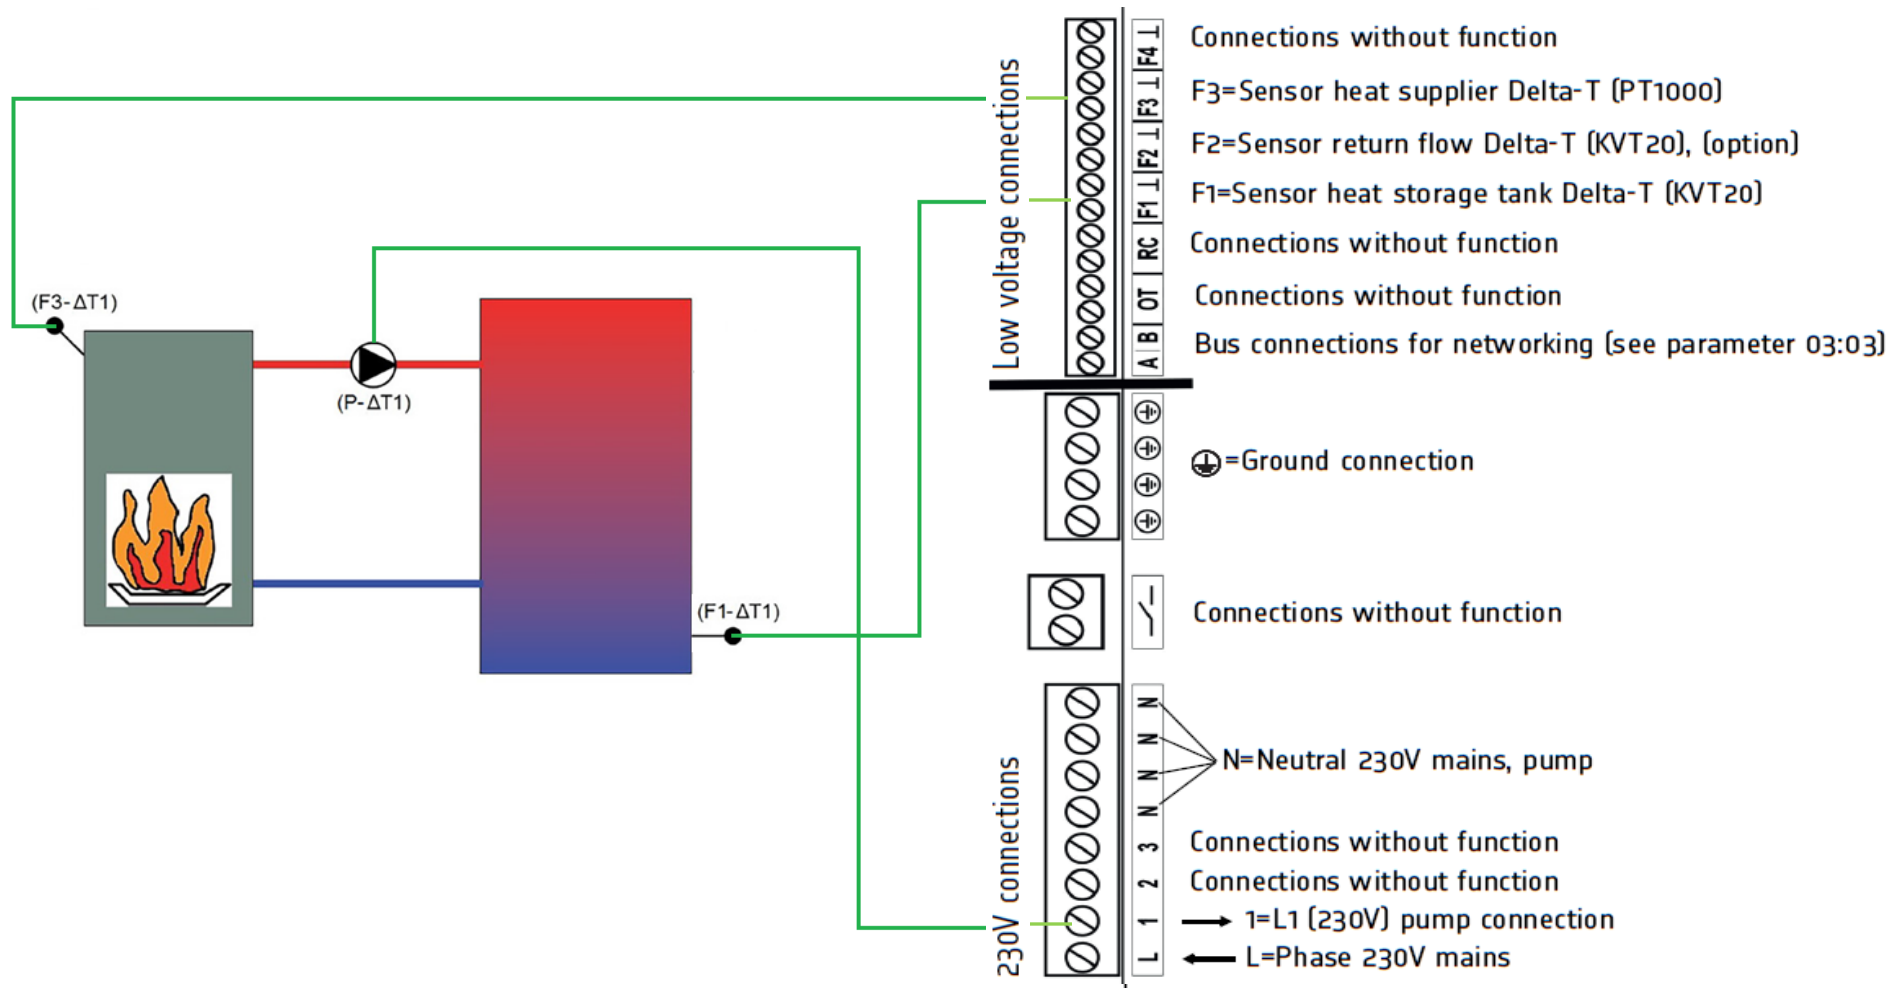



# Do you have any questions?

You can reach our support by e-mail to  
[support@ebv-gmbh.de](mailto:support@ebv-gmbh.de)

