
EbV elektronik



heatcon! components



heatcon! EC 1321pro / EC 1351pro

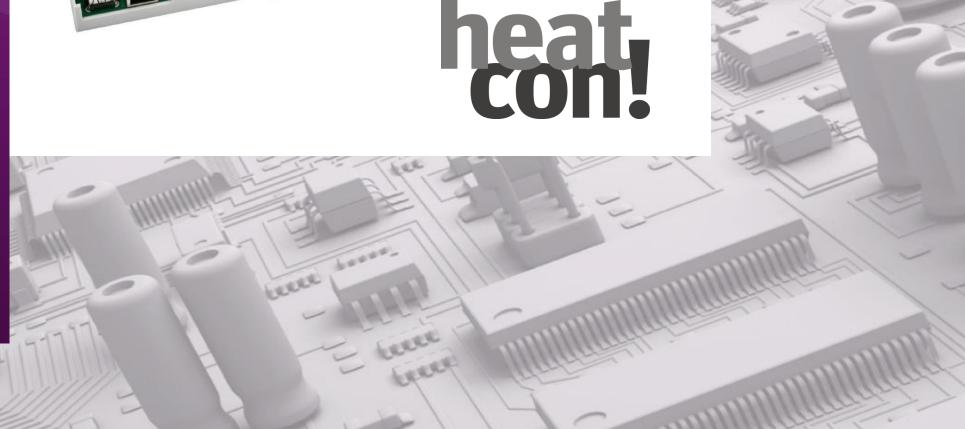

The **heatcon! EC** forms the central control unit in the **heatcon! System.**

It is mounted on a hat rail in the boiler or control cabinet.

A pre-wired wall housing is available as an option.

heatcon! EC 1321 pro

heatcon! EC 1351 pro

Artikelnummer

9600311000



heatcon! MMI (Control panal)



The *heatcon! MMI* is the control unit for the *heatcon!* System for operation without an Internet browser.

This is used to call up the setup wizard during initial commissioning. With only 9 steps the basic configuration of the heatcon! EC will be finished.

heatcon! MMI 200

EbV elektronik Artikelnummer

heatcon! EM (EM 100 / EM 101)

EM 100 (hat rail mounting)



The **heatcon! EM** serves as an extension of the inputs and outputs of a **heatcon! EC** within the system.

- 2x heatcon! EM on the EC are possible
- 1x mix circuit extenseion each
- 1x Variable Output (potential free) each
- 2x 0-10V / PWM Outputs each
- 2x 0-10V Inputs (setpoint input) each



EM 101 (Wall mounting)

heatcon! EM 100

9600704000

heatcon! EM 101 9600708000



Artikelnummer

heatcon! RC 130



The RC 130 is a living room remote control with room temperature detection.

- Connection via 2-wire BUS (h2B) with heatcon! EC
- Display of room setzpoint temperature (top)
- Display of current room temperature (down)
- Desired temperature setting via "+" and "-" keys
- Operating situation indicated by symbols



Artikelnummer

heatcon! EC 1321 pro 9600311000 heatcon! EC 1351 pro

heatcon! GBA



The heatcon! EM - GBA is required if extended wiring of the devices is necessary.

- For connecting cascades with more than two heatcon! EC.
- When using two EM 101
- If there is a greater distance between the heatcon! EC within a cascade

heatcon! GBA



Artikelnummer

heatcon! EM 110-OT



Artikelnummer

Every heatcon! EM 110-OT offers the possibility to connect two OpenTherm machines.

2 OpenTherm machines are connected to an EM 110-OT connectable.

On a heatcon! EC 1351pro can connect up to four heatcon! EM 110-OT.

heatcon! GBA

OpenTherm




heatcon! WG 1000



If the installation does not take place in the boiler, we offer the heatcon! EC is also as a complete set in a comfortable wallmounted housing.


heatcon! EC 1351 pro WG Set	heatcon! WG 1000
9600312000	9540180000





heatcon! WG 1000 In- / Outputs

The wall housing is pre-wired so that the connections are accessible without opening the housing.

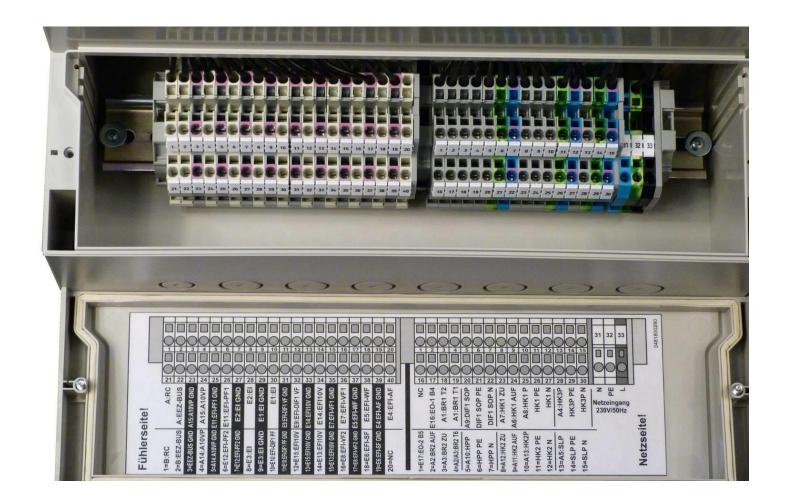



heatapp! gateway and heatapp! radio components



Optionally you can extend the heatcon! system with a heatapp! gateway and the radio components for single room control up

to 24 rooms.









